# Polyform<sup>®</sup> HL3 Heavy Duty buoy

**Product information** 



HL3

Proudly made by The Originator of Modern Plastic Buoys

### **POLYFORM® OF NORWAY**

The POLYFORM® HL-3 is a supreme heavy duty buoy with an extra strong pre-made injection molded ropehold. The buoy and the ribreinforced ropehold are unified through the in-house developed rotomolding WELCOTEC technology. The ribbed and bullet shaped POLYFORM  $^{\text{\tiny M}}$  HL buoys are designed to reduce drag. Under some conditions the drag can be reduced by up to 80% compared to spherical buoys. The HL-series are made from our unique blend of high class tough, flexible vinyl materials. The buoys are resistant to all weather conditions. The HL-series low drag buoys are used all over the world for different applications, such as in commercial fishing as net buoys, buoys for long lines, lobster and crab pots, markers and as heavy duty fenders.

Available in various colours.


# 

Î		Diameter (max recomended)	350 mm
		Height (max)	745 mm
		Weight (nominal)	3,1 Kg
		Eye diameter for ropehold	25 mm
		Valve type	V10
		Gross volume	51 L
		Recommended max load	30,5 Kg
	Technical information		
		Breaking load for ropehold	1100 kp
2		Breaking load for ropehold Buoy body material descr	•
100 CON		<b>e</b> 1	•
100 C		Buoy body material descr	iption .
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break	iption 66
		Buoy body material descr Hardness, shore A Tensile strength	<b>iption</b> 66 13,9 MPa
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break	iption 66 13,9 MPa 587%
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break Cold flex temperature	iption 66 13,9 MPa 587% -33°C
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break Cold flex temperature Recommended max temp.	iption 66 13,9 MPa 587% -33°C 40°C
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break Cold flex temperature Recommended max temp. Temp. not to be exceeded	iption 66 13,9 MPa 587% -33°C 40°C 50°C 1,17
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break Cold flex temperature Recommended max temp. Temp. not to be exceeded Specific gravity Body and Ropehold made from No use of CFC. Cadmium free.	iption 66 13,9 MPa 587% -33°C 40°C 50°C 1,17 PVC.
		Buoy body material descr Hardness, shore A Tensile strength Elongation at break Cold flex temperature Recommended max temp. Temp. not to be exceeded Specific gravity Body and Ropehold made from	iption 66 13,9 MPa 587% -33°C 40°C 50°C 1,17 PVC.

Article number



# Stress (MPa) PVC Material

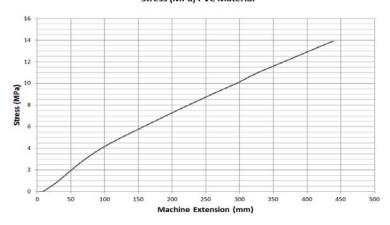

For all measurements, weights and other technical data specified in this data sheet, please allow for a deviation of not less than +/-5%. The illustration may deviate from the actual product.

## **Polyform AS**

Polyform AS is a world leading manufacturer of buoys fenders and floats, and the originator of the modern inflatable plastic buoy. The company is registered in Norway and situated in Ålesund at the northwestern coast of Norway, and benefits from being located in one of the world's most innovative maritime environments.

The product range of Polyform AS consists of: • Inflatable buoys and fenders made

from soft Vinyl plastics.

• Purse Seine Floats, buoys and marina fenders made from BACELL closed cell foam.

•Hard-shell buoys and pontoon floats made from PE and filled with foam

Maru Watersport & Industrie

+31 (0)297-363009 maru@polyform.nl www.maru.nl