
Polyform[®] A4 Heavy Duty buoy



Proudly made by The Originator of Modern Plastic Buoys

POLYFORM® OF NORWAY

The POLYFORM® A-4 is a supreme heavy duty buoy with an extra strong pre-made injection molded ropehold. The buoy and the ribreinforced ropehold are unified through the in-house developed rotomolding WELCOTEC technology. The A-series are made from our unique blend of high class tough, flexible vinyl materials. The buoys are resistant to all weather conditions. The A-series buoys are used all over the world for different applications, such as in commercial fishing as net buoys, buoys for long lines, lobster and crab pots, markers and as heavy duty fenders.

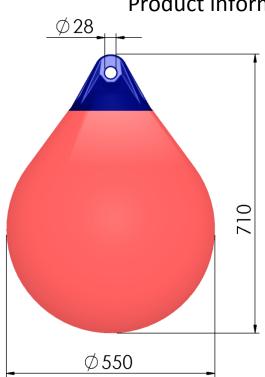

Product information

Article number	A4
Diameter (max recomended)	550 mm
Height (max)	710 mm
Weight (nominal)	4,1 Kg
Eye diameter for ropehold	28 mm
Valve type	V10
Gross volume	90 L
Recommended max load	54 Kg

Technical information

Breaking load for ropehold	2000 kp	
Buoy body material description		
Hardness, shore A	66	
Tensile strength	13,9 MPa	
Elongation at break	587%	
Cold flex temperature	-33°C	
Recommended max temp.	40°C	
Temp. not to be exceeded	50°C	
Specific gravity	1,17	
Buoy and Ropehold made from PVC.		
No use of CFC. Cadmium free.		
Made by Welcotec production technology		



Available in various colours.

Polyform AS

Polyform AS is a world leading manufacturer of buoys fenders and floats, and the originator of the modern inflatable plastic buoy. The company is registered in Norway and situated in Ålesund at the northwestern coast of Norway, and benefits from being located in one of the world's most innovative maritime environments.

The product range of Polyform AS consists of: • Inflatable buoys and fenders made from soft Vinyl plastics.


•Purse Seine Floats, buoys and marina fenders made from BACELL closed cell foam.

•Hard-shell buoys and pontoon floats made from PE and filled with foam.

Maru Watersport & Industrie

+31 (0)297-363009 maru@polyform.nl www.maru.nl

Stress (MPa) PVC Material

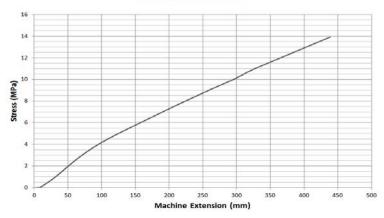

For all measurements, weights and other technical data specified in this data sheet, please allow for a deviation of not less than +/-5%. The illustration may deviate from the actual product.